




**For use in:**  
Factory Automation  
Robotic Motion Control  
X/Y Table position feedback  
Mil/aero test stands

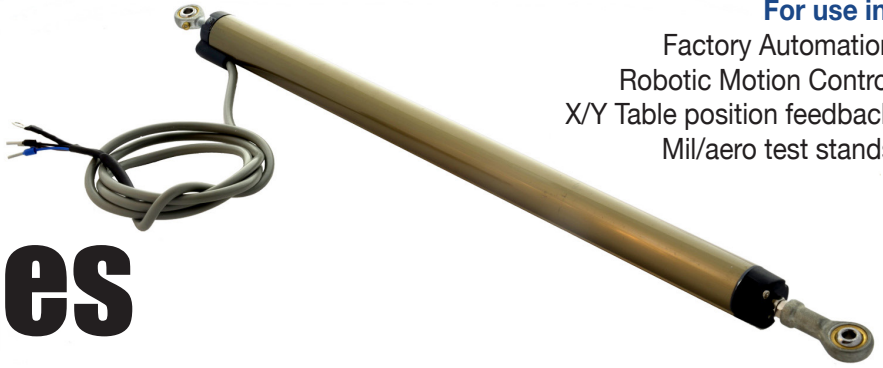

# LP-22 Series Linear Potentiometer

Linear Potentiometer Designed specifically for the factory automation industry

The LP-22 series linear potentiometer is a cost effect solution for factory automation linear position sensing applications like robotic motion control, X-Y table position feedback, flow control valve position, suspension travel, press and die position, injection molding machines, and mil/aero test stand applications. This 3-wire resistive film sensor is available in stroke lengths from 25 to 300 mm, with a maximun linearity error of 0.1% of full scale. The sensor is provided with swivel rod eyes at each end for self-alignment and easy mounting. A 22 mm diameter anodized aluminum housing rated IP-64 protects the unit from airborne contaminants, and the sensor is rugged enough to withstand the typical shock and vibration environments of industrial shop floors.

## Features:

- Full ranges from 25 to 300 mm (1 to 12 inches)
- Self-aligning swivel rod eyes on both ends
- 1 m long, 3-conductor cable
- 22 mm OD anodized aluminum housing

## Environmental Specifications:

Operating temperature	-40 to 150 C
Temperature coefficient	<1.5 ppm/°C
Shock	50 g (IEC 68-2-29, single hit)
Vibration	20 g (IEC 68-2-6)
Environmental protection	IEC IP-64

## Performance Specifications:

Input current	≤12 mA
Resolution	Infinite
Output range	0 to 100% of input
Repeatability	0.01 mm (0.0004 inch)
Max operating speed	5 m/s

**ALLIANCE SENSORS GROUP**  
A DIVISION OF H.G. SCHAEVITZ LLC

