



**For use in:**  
Cylinder/Actuator Position Feedback  
Steel/Aluminum/Paper Mills  
Factory Automation  
Food Processing  
Valve Position



# LHA-19-A Series

## Hermetically Sealed AC-LVDT

Rugged for Harsh Environments

The LHA-19-A series AC-LVDT (Linear Variable Differential Transformer) linear position sensors by H.G. Schaevitz LLC dba Alliance Sensors Group are hermetically sealed, contactless devices designed for industrial and commercial applications, such as: factory automation, metal and paper mills, valve position, robotic assembly systems, pharmaceutical and food processing, and outdoor or wet environment applications. These ruggedized linear devices have excellent price-vs-performance and stroke-to-length ratios, making LHA-19-A AC-LVDT sensors ideal for use in power generation and industrial automation equipment, and many OEM positioning applications.

LHA-19-A series AC-LVDTs are offered in 11 ranges from  $\pm 0.050$  to  $\pm 10.0$  inches ( $\pm 1.27$  to  $\pm 254.0$  mm) with excellent linearity and infinite resolution. LHA-19-A series AC-LVDTs operate from a nominal 3 Vrms, 2.5 to 3.3 kHz excitation source. They are packaged in a 0.750 inch (19.0 mm) OD SS housing and are offered with either an imperial or metric threaded 0.188 inch (4.8 mm) diameter core, PTO2-10-6P (6-pin) connector, and have a 0.235 inch (6.0 mm) ID for good core-to-bore clearance. It has a wide operating temperature range.

When mated with ASG's industrial AC-LVDT DIN-rail-mountable signal conditioner, the LHA-19-A series AC-LVDT becomes part of a complete measurement solution.

ASG's AC-LVDTs are also offered in other diameters and longer range versions, including the LA-9.5, LA-19, LA-20.6, LA-21, LA-25, and LA-27.

### Features:

- Hermetically Sealed AC-LVDT
- Welded 3/4 inch OD Housing with radial connector
- Axial PTO2-10-6P connector

### Options:

- Metric Threaded Core


### Electrical Specifications:

Available Ranges:	$\pm 0.050$ ", 0.125", 0.250", 0.500", 1.0", 2.0", 3.0", 4.0", 5.0", 6.0", 7.5", and 10.0"
Excitation Frequency:	2.5 to 3.3 kHz
Excitation Voltage:	3 V ACrms nominal
Linearity Error:	$\leq \pm 0.25\%$ of FSO (typical .015%)
Null Voltage:	$< 0.05\%$ of FSO
Operating Temperature:	-55 to 125 C (-65 to 257°F)
Operating Coefficient:	$< -0.02\%$ FSO/K
Humidity:	95% RH, non-condensing
Shock:	1000 g, 11 msec.
Vibration:	20 g to 2 kHz


**ALLIANCE SENSORS GROUP**  
A DIVISION OF H.G. SCHAEVITZ LLC

# LHA-19-A Series

Nominal Range	Sensitivity	Primary Z	Body Length A	Core Length B	Null Point N	Body Weight	Core Weight
inches [mm]	mV/V/.001in [mm]	Ohms	inches [mm]	inches [mm]	inches [mm]	oz. [grams]	oz. [grams]
±0.05 [1.3]	6.10 [240]	325	2.01 [51.1]	0.80 [20.3]	0.63 [16]	1.6 [45]	0.08 [2.4]
±0.12 [3.0]	3.90 [155]	735	2.64 [67.1]	1.25 [31.7]	0.94 [24]	2.1 [59]	0.12 [3.7]
±0.25 [6.3]	2.40 [96]	1400	3.35 [85.1]	1.65 [41.9]	1.32 [33]	2.5 [71]	0.18 [4.8]
±0.50 [12.5]	0.63 [25]	1200	5.92 [150.4]	3.45 [87.6]	2.57 [65]	3.3 [93]	0.40 [11.6]
±1.00 [25]	0.61 [24]	1250	7.38 [167.5]	3.45 [87.6]	3.32 [84]	4.3 [122]	0.40 [11.6]
±2.00 [50]	0.37 [15]	2150	10.91 [277.1]	5.30 [314.6]	5.07 [129]	6.2 [176]	0.65 [18.0]
±3.00 [75]	0.25 [9.8]	2150	13.85 [346.1]	6.20 [157.5]	6.29 [160]	8.2 [232]	0.80 [22.0]
±4.00 [100]	0.17 [6.7]	420	16.17 [410.7]	6.20 [157.5]	7.65 [194]	9.2 [260]	0.80 [22.0]
±5.00 [125]	0.12 [4.7]	600	18.65 [473.8]	6.20 [157.5]	8.94 [227]	10.0 [283]	0.80 [22.0]
±7.50 [190]	0.11 [4.3]	775	23.85 [605.8]	7.00 [177.8]	11.52 [293]	14.2 [402]	0.90 [25.5]
±10.00 [250]	0.07 [2.8]	620	31.68 [804.7]	9.50 [241.3]	15.42 [392]	18.3 [519]	1.20 [34.0]

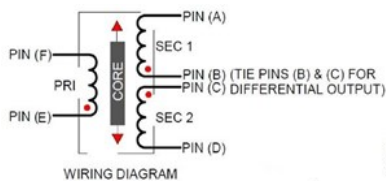

PT02-10-6P Connector	
A	Secondary 1
B	Secondary 1*
C	Secondary 2*
D	Secondary 2
E	Primary
F	Primary
*	Connect pin B to pin C for differential secondary output

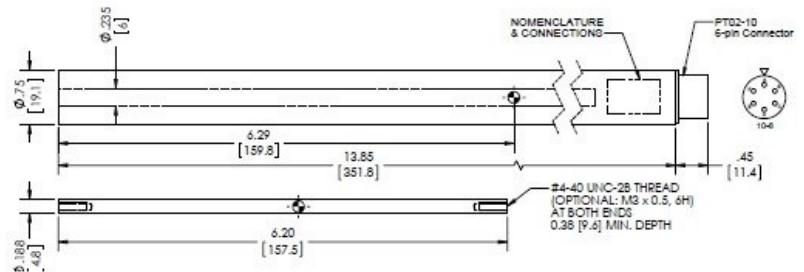

## Ordering Information:

Series Name	Body Diameter (XX)	Termination Topology (X)	Bipolar Range, Inches (XXX)	I/O Connection (XX)	Options (XX)
LHA	19 - 19 mm	A- Axial	0.05 - ±.050 inches	02 - PT02-10-6P	06- Metric
			0.125 - ±.125 inches		
			0.25 - ±.250 inches		
			0.5 - ±.500 inches		
			01 - ±1.0 inches		
			02 - ±2.0 inches		
			03 - ±3.0 inches		
			04 - ±4.0 inches		
			05 - ±5.0 inches		
			07.5 - ±7.5 inches		
			10 - ±10.0 inches		

**ALLIANCE SENSORS GROUP**  
A DIVISION OF H.G. SCHAEVITZ LLC

Alliance Sensors Group  
7300 Rt 130 N, Suite 22  
Pennsauken, NJ 08110 USA  
Ph: 856-727-0250  
www.alliancesensors.com  
info@alliancesensors.com